


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00127	Connector, dc jack, 5.5x2.1xL17.5 mm, molding style	1	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00054	Overmold, 60P, PVC, black	1	

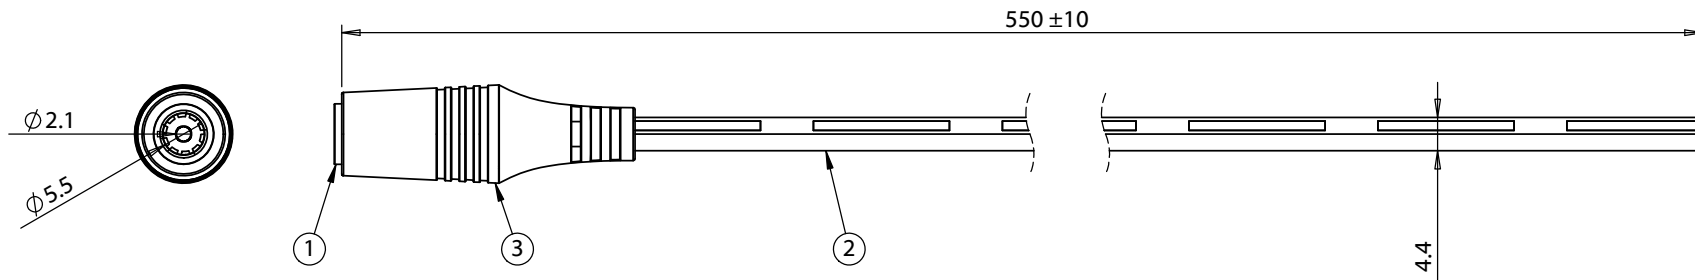

Wiring diagram	
50-00127	Wire Color
Center	Black with stripe
Sleeve	Black

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>		
A	3/22/2010	Initial release		RoHS and REACH compliant			
A1	8/10/2015	added connector and wire part numbers	VERIFIED:	Function test: no open, no reversed polarity, no short circuit, no INT	SIZE	PART NUMBER	
			DIMENSIONS ARE IN MILLIMETERS	Functionally equivalent components may be used	A	053-0705R	
			TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	DESCRIPTION: Cable, 550 mm, 5.5x2.1 dc jack 50-00127 to blunt cut, 18 AWG, UL2468, 30-00007 wire	SCALE: 1:1	WEIGHT:	SHEET 1 OF 1